



Perfectly reduce mechanical contamination, such as: sand, rust, suspensions.



Used as pre-filtration cartridges in filtering systems



They match the majority of systems and housings available on the market



High quality

High quality cartridges made of non-woven polypropylene fabric they remove mechanical contamination: sand, mud, suspensions



www.supremefilters.com

Description:

S-PP series – high quality mechanical cartridges made of non-woven polypropylene fabric.

They remove all mechanical contaminations, such as: sand, mud, rust and sludges contained in water from 1 µm to 50 µm.

The offer includes cartridges in the following sizes: 10", 10" BB, 20", 20" BB, 30" and microns: 1 µm, 5 µm, 20 µm and 50 µm.

The cartridges are compatible with the majority of housings and systems available on the market. They have current PZH certification, which approves a product for contact with drinking water.


Advantages:

- Perfectly reduce mechanical contamination, such as: sand, rust, suspensions
- They are used mainly as the first stage of filtration of drinking and utility water
- They ensure perfect filtration at low pressure drop
- Resistant to chemicals
- Resistant to growth of bacteria
- They match the majority of systems and housings available on the market
- PZH certification
- Competitive price
- Quick delivery of orders
- High quality



10" cartridge with embossed **SUPREME LOGO**.

Moreover, we inform that 10" cartridges will have engraved SUPREME logo. SUPREME logo, apart from an advertisement, is an identifier of the wear of cartridges.

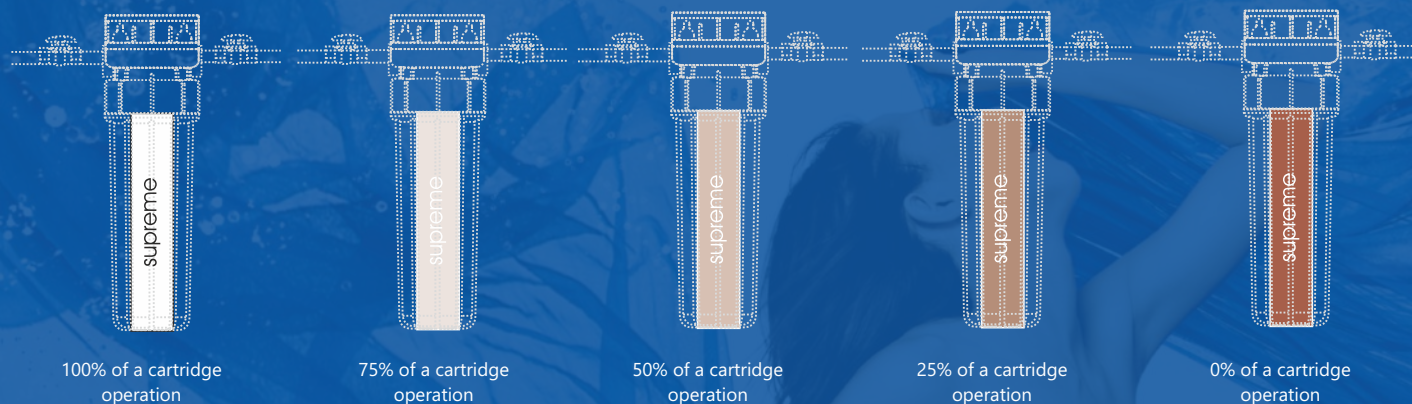

Technical information:

Part number	Dimensions	Filtration	Efficiency	Work. temp.	Longevity*
S-PP1	9 7/8" x 2 1/2"	1	20	2°C - 45°C	3 - 6 months
S-PP5	9 7/8" x 2 1/2"	5	20	2°C - 45°C	3 - 6 months
S-PP20	9 7/8" x 2 1/2"	20	20	2°C - 45°C	3 - 6 months
S-PP50	9 7/8" x 2 1/2"	50	20	2°C - 45°C	3 - 6 months
S-PP1-20	20" x 2 1/2"	1	30	2°C - 45°C	3 - 6 months
S-PP5-20	20" x 2 1/2"	5	30	2°C - 45°C	3 - 6 months
S-PP20-20	20" x 2 1/2"	20	30	2°C - 45°C	3 - 6 months
S-PP50-20	20" x 2 1/2"	50	30	2°C - 45°C	3 - 6 months
S-PP5-30	30" x 2 1/2"	5	60	2°C - 45°C	3 - 6 months
S-PP20-30	30" x 2 1/2"	20	60	2°C - 45°C	3 - 6 months
S-PP1MBB10	9 7/8" x 4 1/2"	1	40	2°C - 45°C	3 - 6 months
S-PP5MBB10	9 7/8" x 4 1/2"	5	40	2°C - 45°C	3 - 6 months
S-PP20MBB10	9 7/8" x 4 1/2"	20	40	2°C - 45°C	3 - 6 months
S-PP50MBB10	9 7/8" x 4 1/2"	50	40	2°C - 45°C	3 - 6 months
S-PP1MBB20	20" x 4 1/2"	1	60	2°C - 45°C	3 - 6 months
S-PP5MBB20	20" x 4 1/2"	5	60	2°C - 45°C	3 - 6 months
S-PP20MBB20	20" x 4 1/2"	20	60	2°C - 45°C	3 - 6 months
S-PP50MBB20	20" x 4 1/2"	50	60	2°C - 45°C	3 - 6 months

* the service life of the cartridges depends on the quality of raw water.